
TAPING & PACKAGING SPECIFICATIONS 編帶與包裝標準

☐ For Chip Type 適用於貼片式

■ Carrier Tape Dimensions 載帶尺寸


● ∅4~∅10 (mm)

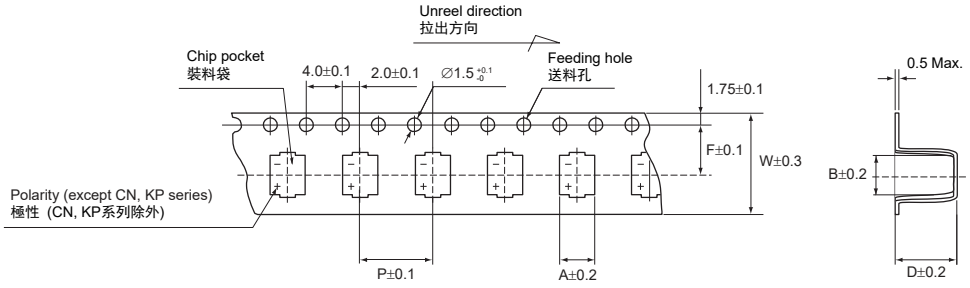

Dimension 尺寸表 (Unit: mm)

∅D × L	4×5.4/5.8	5×5.4/5.8	6.3×5.4/5.8	6.3×6/7.7	8×10/10.5/12.5	10×10.5/12.8	10×13.5/16.5
W	12.0	12.0	16.0	16.0	24.0	24.0	24.0
P	8.0	12.0	12.0	12.0	16.0	16.0	16.0
F	5.5	5.5	7.5	7.5	11.5	11.5	11.5
A	4.7	5.7	7.0	7.0	8.7	10.7	10.7
B	4.7	5.7	7.0	7.0	8.7	10.7	10.7
D	5.8/6.3	5.8/6.3	5.8/6.3	6.4/8.3	11.0/11.0/13.2	11.0/13.2	14.1/17.5


● ∅12.5~∅18 (mm)

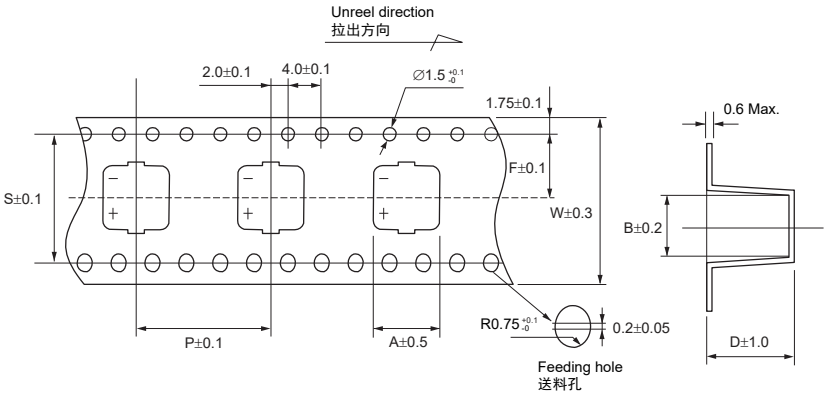

Dimension 尺寸表 (Unit: mm)

∅D × L	12.5×13.5	12.5×16	16×16.5	18×16.5/18.5/21.5
W	32.0	32.0	44.0	44.0
P	24.0	24.0	28.0	32.0
F	14.2	14.2	20.2	20.2
A	14.0	14.0	17.5	19.5
B	14.0	14.0	19.5	19.5
D	15.0	17.5	17.5	17.5/20.5/23.5
S	28.4	28.4	40.4	40.4

■ Reel Dimensions 卷盤尺寸

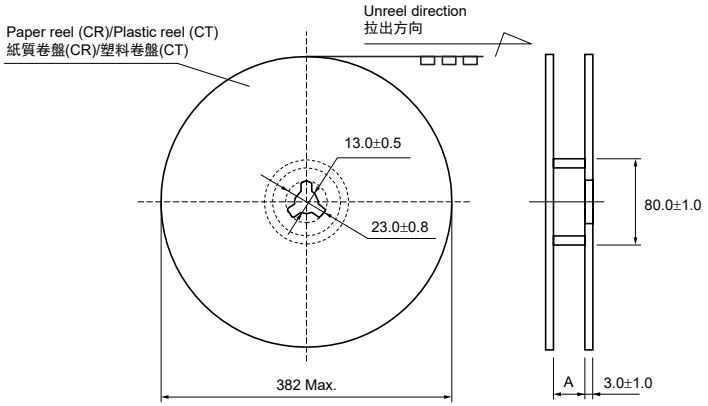

Type 製品別	Taping & Reel Code 編帶與卷盤代碼
Chip Type Aluminum Electrolytic Capacitors 貼片式鋁電解電容器	CR (≤∅10mm) CT (≥∅12.5mm)
Chip Type Conductive Polymer Aluminum Solid Electrolytic Capacitors 貼片式導電性高分子固態鋁電解電容器	CT
Chip Type Conductive Polymer Hybrid Aluminum Electrolytic Capacitors 貼片式導電性高分子混合型鋁電解電容器	CT

(Unit: mm)

∅D	∅4, ∅5	∅6.3	∅8, ∅10	∅12.5	∅16, ∅18
A±1.0	14	18	26	34	46

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.
注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。

■ Packaging Quantity 包裝數量

☐ For Chip Type Aluminum Electrolytic Capacitors
適用於貼片式鋁電解電容器

Case Size ∅D × L (mm) 製品尺寸	Quantity/Reel (pcs) 數量/卷（個）	Reels/Inner Box 卷盤/內箱	Quantity/Outer Box (pcs) 數量/外箱（個）	Outer Box Size 外箱尺寸 L × H × W (mm)
4 × 5.4, 5.8	2,000*	12	24,000	400 × 390 × 245
5 × 5.4, 5.8	1,000*	12	12,000	
6.3 × 5.4, 5.8, 7.7	1,000*	10	10,000	
6.3 × 10.5	750*	10	7,500	
6.3 × 11.5	500*	10	5,000	
8 × 6.2	1,000*	10	10,000	
8 × 10.5, 12.5	500*	7	3,500	
10 × 10.5, 12.5, 13.5	500*	7	3,500	
12.5 × 13.5	250*	6	1,500	
12.5 × 16	200*	6	1,200	
16 × 16.5	150*	4	600	
18 × 16.5, 18.5	125*	4	500	
18 × 21.5	125*	4	500	

☐ For Chip Type Conductive Polymer Aluminum Solid Electrolytic Capacitors & Chip Type Conductive Polymer Hybrid Aluminum Electrolytic Capacitors
適用於貼片式導電性高分子固態鋁電解電容器及貼片式導電性高分子混合型鋁電解電容器

Case Size ∅D × L (mm) 製品尺寸	Quantity/Reel (pcs) 數量/卷（個）	Reels/Box 卷盤/箱	Quantity/Carton (pcs) 數量/外箱（個）	Carton Box Size 外箱尺寸 L × H × W (mm)
4 × 5.5	2,000*	12	24,000	400 × 390 × 245
5 × 5.5~8	1,000*	12	12,000	
5 × 9	750*	12	9,000	
6.3 × 4.2~4.5	1,500*	10	15,000	
6.3 × 5.5~8	1,000*	10	10,000	
6.3 × 9~9.5	750*	10	7,500	
6.3 × 12	500*	10	5,000	
8 × 6.7~7.7	750*	8	6,000	
8 × 8~12.5	500*	8	4,000	
10 × 8~10.5	500*	8	4,000	
10 × 12.5, 12.8, 13.5	450*	8	3,600	
10 × 16.5	300*	8	2,400	

* Minimum package quantity *最小包裝數量

- There are some differences between actual package quantity and above list. Please confirm before you order.
- Please order by minimum package quantity.
- 以上包裝標準可能會與實際的包裝數量有所不同，請在訂購前確認。
- 請以最小包裝數量訂購。

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.
注：以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。