
TAPING SPECIFICATIONS 編帶標準

☐ For Automatic Insertion (Radial Lead Type) 自動插件用 (適用於引線式)




■ Drawing (Unit: mm) 外形圖


(Drawing A: Formed Lead)
圖 A: 引脚成型

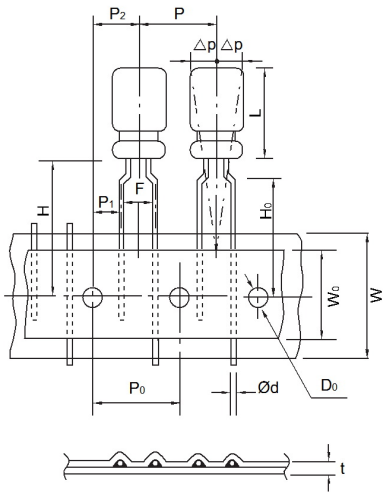

(Drawing B: Straight Lead) (*1)
圖 B: 直脚 (*1)

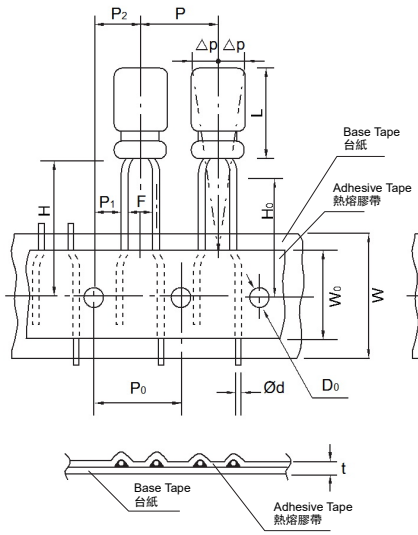

(Drawing C: Straight Lead) (*1)
圖 C: 直脚 (*1)

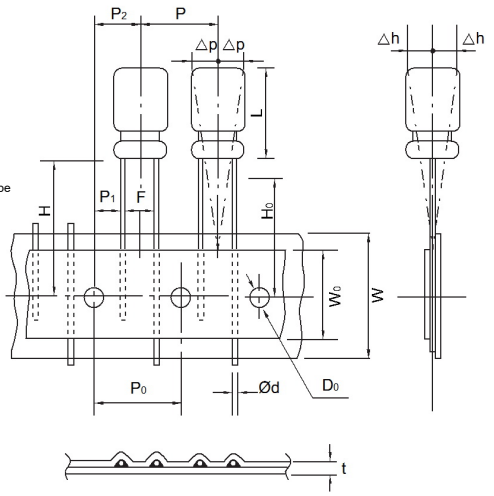

■ Dimensions (Unit: mm) 尺寸表

Application to Drawing 對應外形圖			B (*1)				C (*1)							A								C (*1)		
Descriptions 內容	Symbol 符號	Tolerance 允差	∅3	∅4	∅5		∅5		∅6.3		∅8			∅4	∅5		∅6.3		∅8			∅10	∅13	∅16,∅18
Case Height 鋁殼高度	L	Note (*2)	5	5,7	5,7	11	5,7	11	5,7	11.5	5	7~14	16~20	5,7	5,7	11	5,7	11.5	5	7~14	16~20	20 (Max.)	25 (Max.)	35,40 (Max.)
Lead Wire Diameter 引線直徑	∅d	±0.05	0.45	0.45	0.45	0.5	0.45	0.5	0.45	0.5	0.45	0.5	0.6	0.45	0.45	0.5	0.45	0.5	0.45	0.5	0.6	0.6	0.6	0.8
Body Pitch 電容器本體間距	P	±1.0	12.7				12.7		12.7		12.7			12.7					12.7			12.7	15.0	30.0
Feeding Hole Pitch 運送孔間距	P_0	±0.2	12.7				12.7		12.7		12.7			12.7					12.7			12.7	15.0	15.0
Feeding Hole Center to Lead 運送孔至引線寬度	P_1	±0.7	5.1				5.1		5.1		5.1			3.85					3.85			3.85	5.0	3.75
Feeding Hole Alignment 運送孔至電容器本體寬度	P_2	±1.0	6.35				6.35		6.35		6.35			6.35					6.35			6.35	7.5	7.5
Lead Center Spacing 引線間距	F	+0.8 -0.2	2.5				2.0		2.5		3.5			5.0					5.0			5.0	5.0	7.5
Base Tape Width 台紙寬度	W	±0.5	18.0				18.0		18.0		18.0			18.0					18.0			18.0	18.0	18.0
Adhesive Tape Width 熱熔膠帶寬度	W_0	Min.	10.0				10.0		10.0		12.0			10.0					12.0			12.0	12.0	12.0
Length from Seating Plane 電容器本體至紙帶中心高度	H	±0.75	17.5 (11L=18.5)				17.5	18.5	17.5		18.5			18.5 (5,7L=17.5)					18.5	18.5	20.0	18.5	18.5	18.5
Lead Clinch Height 引線彎曲至運送孔高度	H_0	±0.5	17.0				17.0		—		—			16.0					16.0	16.0		—	—	—
Feeding Hole Diameter 運送孔直徑	$∅D_0$	±0.2	4.0				4.0		4.0		4.0			4.0					4.0			4.0	4.0	4.0
Total Tape Thickness 台紙與熱熔膠帶的總厚度	t	±0.3	0.7				0.7		0.7		0.7			0.7					0.7			0.7	0.7	0.7
Body Inclination 電容器本體傾斜度	△h	Max.	1.0				1.0		1.0		1.0			1.0					1.0			1.0	1.0	1.0
Body Inclination 電容器本體傾斜度	△p	Max.	1.0				1.0		1.0		1.0			1.0					1.0			1.0	1.0	1.0
Taping Code 編帶代碼			TS				TE		TS		TS			TA					TA			TS	TS	TS

(*1) For Radial Lead Type Conductive Polymer Aluminum Solid Capacitors & Radial Lead Type Conductive Polymer Hybrid Aluminum Capacitors only. Please consult with us before you order.
僅適用於引線式導電性高分子固態鋁電解電容器及引線式導電性高分子混合型鋁電解電容器。請在訂購前向我們諮詢。

(*2) Please refer to the drawing of each series for tolerance.
請查閱相應系列外形圖的允許誤差。

Note: All design and specifications are for reference only and is subject to change without prior notice. If any doubt about safety for your application, please contact us immediately for technical assistance before purchase.
注: 以上所提供的設計及特性參數僅供參考，任何修改不作預先通知。如果在使用上有疑問，請在採購前與我們聯繫，以便提供技術上的協助。